


Project : STANDARD  
 Model No : HR065R15004MCAS

**45W LED PANEL 65x100mm RECTANGULAR**

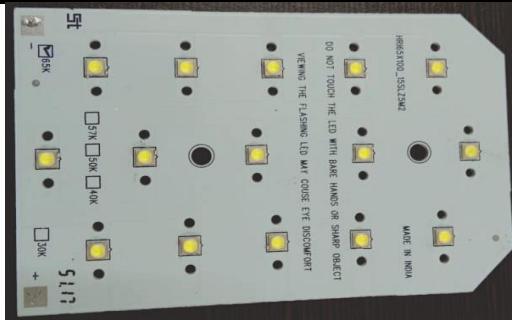

Input Characteristics			Mechanical Details	
1	Typical Voltage (Un)	45 Vdc	Weight	gm
2	Operating Voltage Range	45 - 50 Vdc	Panel Dimensions	100*65mm
3	Typical Current (A)	1A	Length W/Mount	100mm
4	Wattage (W) MAX	45W	Width	65mm
5	Nos Of LED	15	Center to Center (CTC)	175x85mm
6	LEDs Aray Combination	15 in Series	Thickness	1.6mm
7	Viewing Angle	120° Degree		
8	LED Color Tempreture	6500K	PCB Material	MCPCB
9	Luminous flux	4950 lm*	Polarity Connection	On PCB
10	Operating Tempreture	-15° to 50°C	Input Connections	Wires
11	Maintenace of Lumen output -L70	50,000 hours at 25°C	Wires Colors and Polarity	
12	LED Make	SAMSUNG	Positive (+ve )	RED
13	LED Package	Z5M2	Negative (-ve )	BLACK

Environmental Operating Details				Features	
1	Minimum Ambient Temperature		-30°C	1. High System Efficiency - 110lm/W. 2. High Color Redering and good light uniformity. 3. Energy Saving. 4. Improve working enviroment. 5. Long life time: 25,000 hours minimum. 6. *Lumen Flux depend on Reflector/Diffuser.	
2	Maximum Ambient Temperature		50°C		
Ordering Information					
Sr No	Model Number	Description	Case Lot		
1	HR065R15004MCAS	LED PANEL 65X100mm Rectangular	50		

Add:-SR.NO. 14, Dhadge ind Estate, plot no.3 Singhgad Road, Nanded Phata, Pune-411041, Maharashtra(India),mobile no:8668334832  
 Email : marketing@hrindustry.net ,hrindustry12@outlook.com , web:- www.hrindustry.net , Contact:- 9049378851,968999702