




Project : STANDARD
Model No : HR195R11052MCAO

50W LED PANEL 195x115mm RECTANGULAR

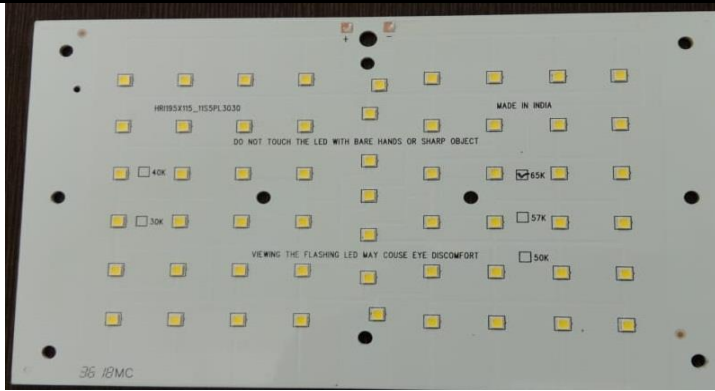

Input Characteristics

Mechanical Details

1	Typical Voltage (Un)	66 Vdc	Weight	100gm
2	Operating Voltage Range	65- 70Vdc	Panel Dimensions	195*115mm
3	Typical Current (A)	0.75 A	Length W/Mount	195mm
4	Wattage (W) MAX	50W	Width	115mm
5	Nos Of LED	55	Center to Center (CTC)	175x85mm
6	LEDs Aray Combination	11in Series 5 in parallal	Thickness	1.6mm
7	Viewing Angle	120° Degree		
8	LED Color Tempreture	6500K	PCB Material	MCPCB
9	Luminous flux	6050 lm*	Polarity Connection	On PCB
10	Operating Tempreture	-15° to 50°C	Input Connections	Wires
11	Maintenace of Lumen output -L70	50,000 hours at 25°C	Wires Colors and Polarity	
12	LED Make	OSARAM	Positive (+ve)	RED
13	LED Package	3030	(Negative (-ve)	BLACK

Environmental Operating Details

Features

1	Minimum Ambient Temperature	-30°C	1. High System Efficiency - 110lm/W. 2. High Color Redering and good light uniformity. 3. Energy Saving. 4. Improve working enviroment. 5. Long life time: 25,000 hours minimum. 6.* Lumen Flux depend on Reflector/Diffuser.
2	Maximum Ambient Temperature	50°C	

Ordering Information

Sr No	Model Number	Description	Case Lot
1	HR195R11052MCAO	LED PANEL 195X115mm Rectangular	50

Add:-SR.NO. 14, Dhadge ind Estate, plot no.3 Singhgad Road, Nanded Phata, Pune-411041, Maharashtra(India),mobile no:8668334832

Email : marketing@hrindustry.net ,hrindustry12@outlook.com , web:- www.hrindustry.net , Contact:- 9049378851,9689999702